



ST-38
Tripod Turnstile

SAFETY
LEVEL

AESTHETICS

COSTING

Tripod Turnstile

The ST-38 is the slimmest tripod turnstile, offering a cost-effective solution with an elegant and modern design. It ensures single-person entry, providing a high level of security to prevent unauthorized access or tailgating.


Featuring a classic black-and-white color scheme, the ST-38 combines timeless aesthetics with reliable functionality—making it an ideal choice for high-end environments.

Features


- Supports one-way and two-way operation
- Compatible with all access control systems
- Compact dimensions, ideal for tight spaces
- Energy-efficient with low power consumption
- Smooth and quiet operation
- LED indicators (green/red) for clear passage status
- IP65-rated for water and dust resistance, suitable for indoor and outdoor use
- Meets fire safety requirements—arms drop automatically in emergencies.

Customized Service


- Customizable color to match installation environment
- Flexible dimensions to meet specific requirements
- Logo branding available
- Supports one-way and bi-directional operation
- Supports customized integration with various access control solutions.
- Fully compatible with all access control systems

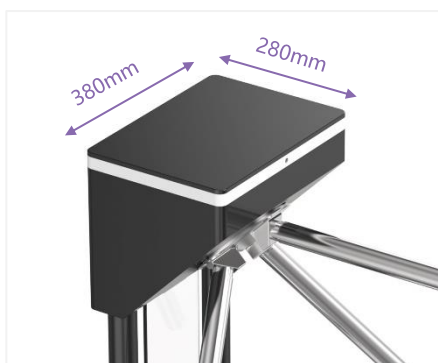


Compact dimensions

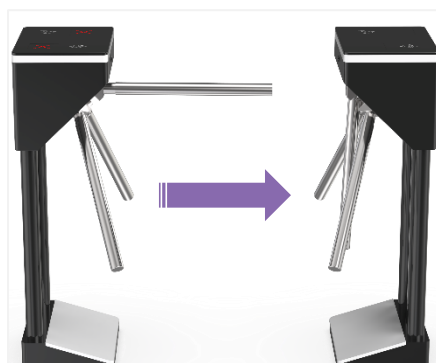

Safety Requirements
Arms Drop Down

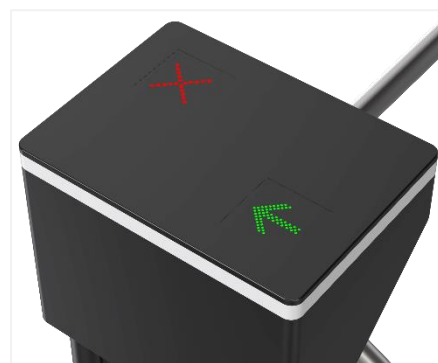

LED Indicator

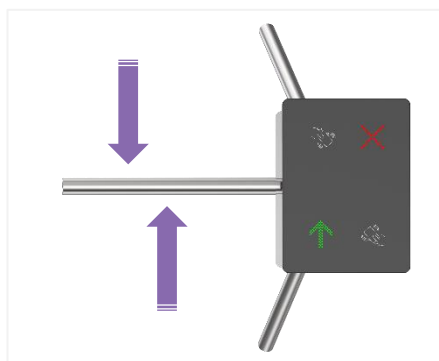


Single / Bi-directional




Anti-trailing Function
(one person can pass at one time)

Access Control System

Seamlessly integrates with any third-party access control system.

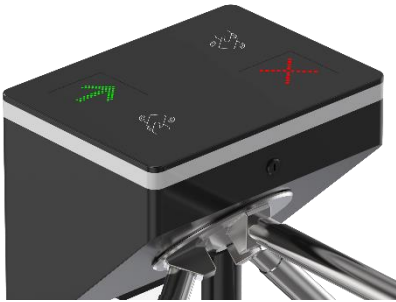

Card Solution (Optional)

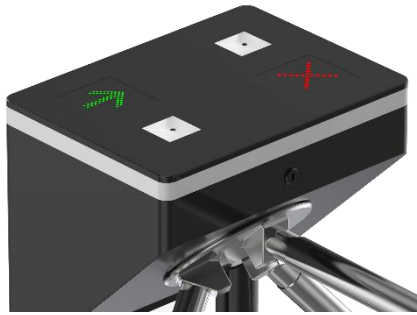

QR/Barcode Solution (Optional)



Biometric Solution (Optional)



Remote Control



Touchless Button



Card



QR Code



Fingerprint



Face



Palm Vein

Tripod turnstiles for secure and efficient access control




Specifications


Model	ST-38
Type	Tripod Turnstile
Framework Material	Stainless Steel + High end black painting
Dimension	380*280*1000mm
Net Weight	35kg/pcs
Passage Width	550mm (arm 500mm)
Passing Direction	Single directional / Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-20 °C - 75 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor waterproof
Flow Rate	40 people per minute
LED Indicator	Two LED indicators on top: green → entry, red × no entry
Emergency	Automatic arm open when power off
Communication	Dry contact, Relay signal, RS485
Flexibility	Integrate with any access control

Dimensions

Front View

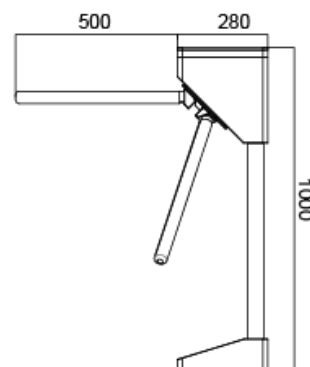

Top View



Side View

