

KP-9152W



Resilience Through Heat, Precision Under Pressure

FEC

KP: KEEN PERMANENCE

RESILIENCE THROUGH HEAT, PRECISION UNDER PRESSURE

KP-9792W / KP-9152W



SPLASH IT. DUST IT. IT STILL WORKS.



0°C - 50°C, RUNS COLD. RUNS HOT.




WET HAND / GLOVE OPERATION



POWER OVER ETHERNET
ONE CABLE SOLUTION

KP SPECIFICATIONS

Model	KP-9792W	KP-9152W
Processor	Intel N97/N150/Core 3 N355	MTK G700
Memory	1 x DDR4 SO-DIMM Socket (Standard 4G, up to 16GB)	1 x DDR4 8G on Board
Storage	1 x M.2 2280 SSD PCIe Gen 3x4 (Standard 128G, up to 512G)	1 x eMMC 64G on Board
Speak	2 x 2W	2 x 2W
Display	22" TFT, 1920 x 1080	22" TFT, 1920 x 1080
Brightness	250 / 500 nits	250 / 500 nits
Touch	P-CAP (Support Water-Resistant & Glove Mode)	P-CAP (Support Water-resistant & Glove Mode)
OS	Windows 10 IoT Enterprise, Windows 10 Pro, Windows 11 IoT Enterprise, Windows 11 Pro, Linux by Request	Android 14
Mounting	VESA 100 x 100 mm	VESA 100 x 100 mm
Certification	FCC, CE Class B	FCC, CE Class B
Construction/Color	Aluminum Die-Casting + Plastic / Grey	Aluminum Die-Casting + Plastic / Grey
Temperature	Operation: 0°C ~ 50°C (32°F ~ 122°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)	Operation: 0°C ~ 50°C (32°F ~ 122°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)
IO Port	1 x 20V DC-in 1 x RJ45 GIGA LAN (Support PoE Function) 3 x USB 2.0 Type-A 1 x USB 3.0 Type-A 1 x RJ45 COM (RS232)	1 x 20V DC-in 1 x RJ45 GIGA LAN (Support PoE Function) 3 x USB 2.0 Type-A 1 x USB 3.0 Type-A 1 x SD Card Slot 1 x USB OTG Type-C 1 x Recovery Button
IP Rating	IP54 (All-Device)	IP54 (All-Device)
Power	20V/90W Adapter	20V/90W Adapter
Dimensions (W x H x D)	Product: 513.5 x 310 x 43 mm in Carton : 670 x 450 x 220 mm	Product: 513.5 x 310 x 43 mm in Carton : 670 x 450 x 220 mm
Weight	Net: 6.0 kg Gross: 8.0 kg	Net: 6.0 kg Gross: 8.0 kg
Optional	Options: PoE PD Module 24V/60W Wi-Fi Module (Internal) Peripherals Options: Scanner / RFID / LED Bar / Camera	Options: PoE PD Module 24V/60W Wi-Fi Module (Internal) Peripherals Options: Scanner / RFID / LED Bar / Camera

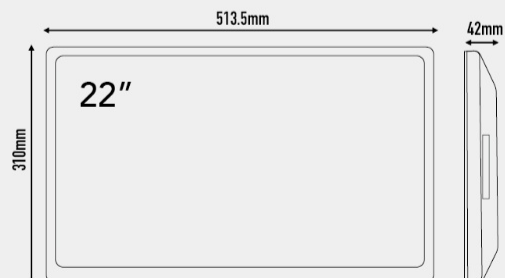

BUILT TO WITHSTAND HARSH ENVIRONMENTS

For more information, contact us at sales@mai.hr

