



**LT-140**  
Tripod Turnstile

SAFETY  
LEVEL

AESTHETICS

COSTING

## Tripod Turnstile

The LT-140 is our most popular tripod turnstile, renowned for its ability to allow only one person to pass at a time—ensuring maximum security and effectively preventing unauthorized tailgating.

Its sleek black-and-white design offers a timeless, elegant look, making it an ideal choice for high-end applications where both aesthetics and security are paramount.

## Features


- Supports one-way and bi-directional operation
- Compatible with all access control systems
- Energy-efficient with low power consumption
- Smooth and quiet performance
- LED indicators (green, red) for clear status display
- IP65-rated waterproof design for indoor and outdoor use
- Fire alarm integration – arms drop automatically in emergencies
- Easy to install and maintain

## Customized Service

- Customizable color to match installation environment
- Flexible dimensions to meet specific requirements
- Logo branding available
- Supports one-way and bi-directional operation
- Supports customized integration with various access control solutions.
- Fully compatible with all access control



Custom Logo

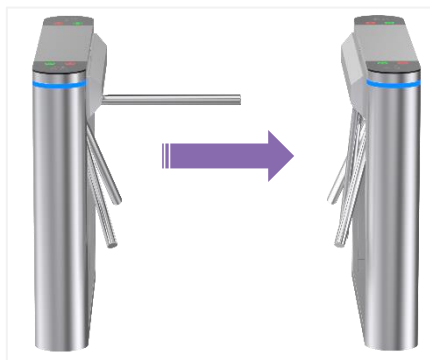


Safety Requirements  
Arms Drop Down



Tempered Glass



LED Indicator

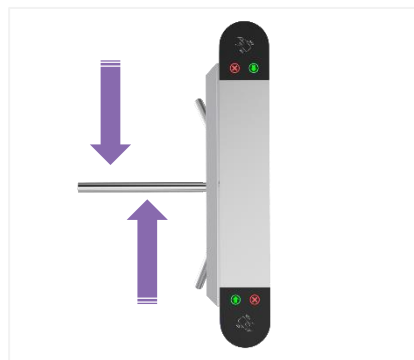

Single / Bi-directional



Anti-trailing Function  
(one person can pass at one time)

## Access Control System

Seamlessly integrates with any third-party access control system.



Card Solution (Optional)



QR/Barcode Solution (Optional)



Biometric Solution (Optional)



Remote Control



Touchless Button



Card



QR Code



Fingerprint




Face



Palm Vein

Tripod turnstiles for secure and efficient access control

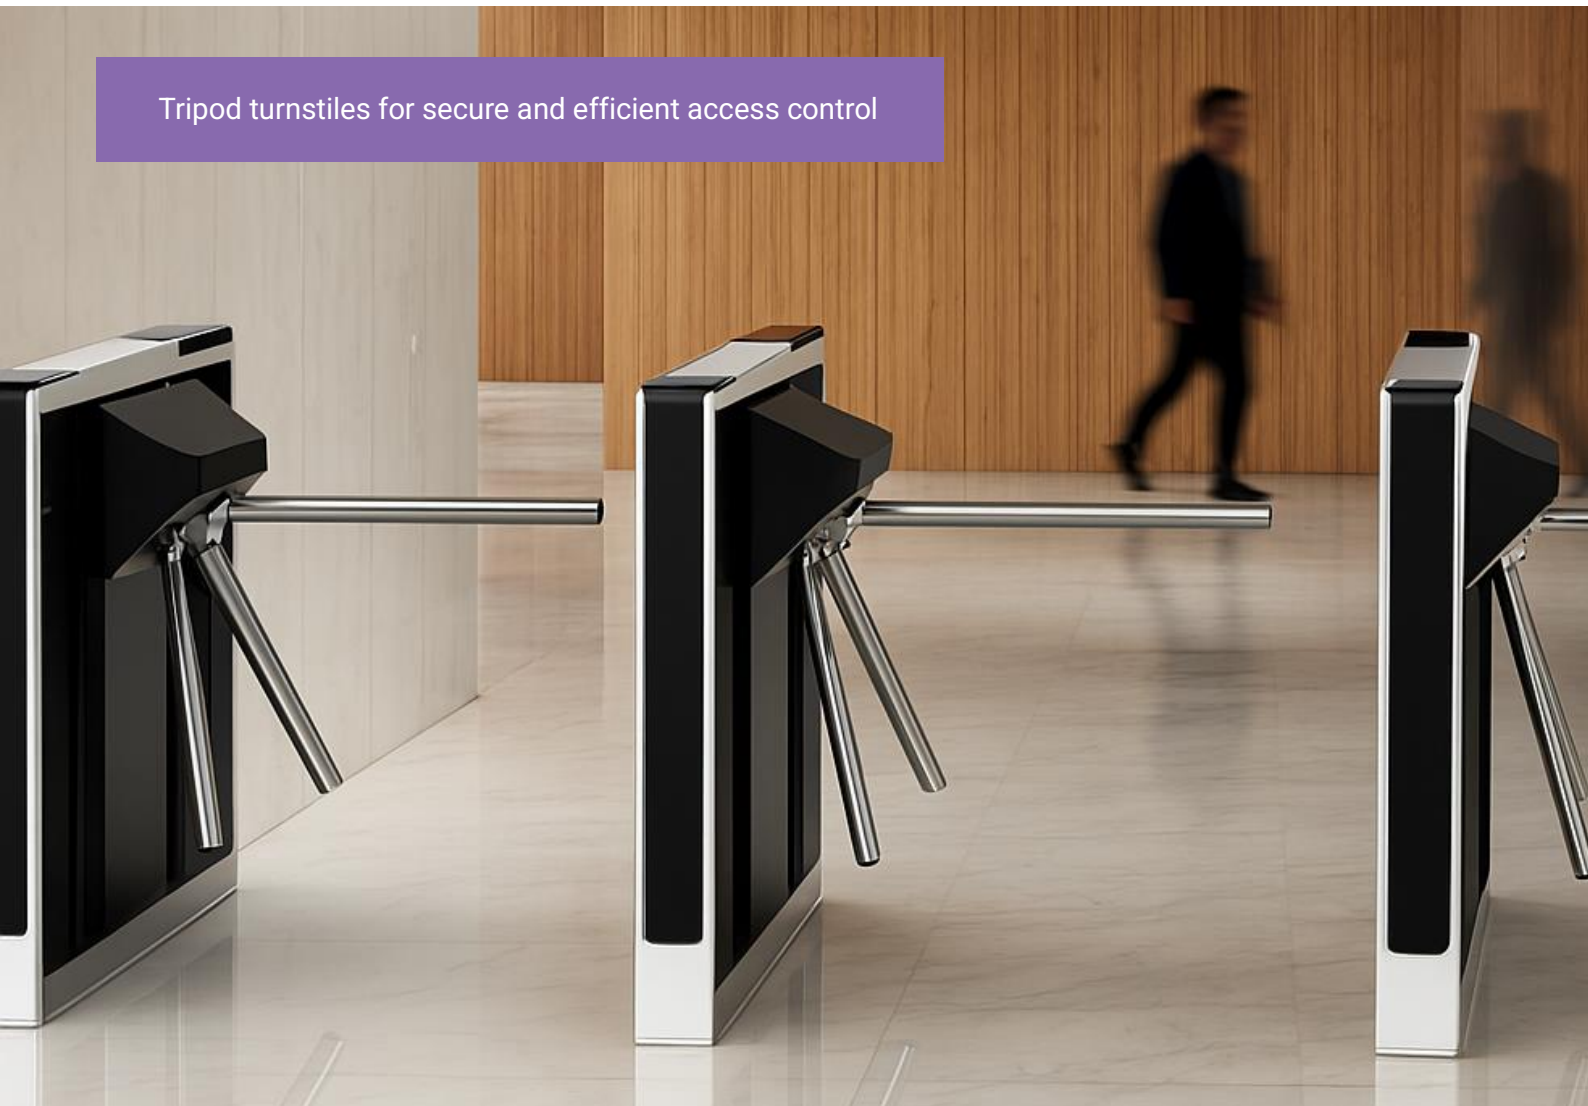


## Specifications


Model	LT-140
Type	Tripod Turnstile
Framework Material	Steel (Black & White) + Tempered Glass
Dimension	1400*120*978mm
Net Weight	75kg/pcs
Passage Width	550mm (arm 500mm)
Passing Direction	Single directional / Bi-directional
MCBF	10 million
Power Supply	AC220V/110V, 50/60Hz
Operation Voltage	24V DC
Power Consumption	40W
Operation Temperature	-20 °C - 75 °C
Operation Humidity	0 ~ 95% (No freeze)
Working Environment	Indoor / Outdoor waterproof
Flow Rate	40 people per minute
LED Indicator	Two LED indicators on top: green → entry, red × no entry
Emergency	Automatic arm open when power off
Communication	Dry contact, Relay signal, RS485
Flexibility	Integrate with any access control

## Dimensions

Front View

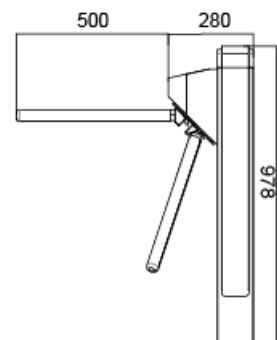

Top View

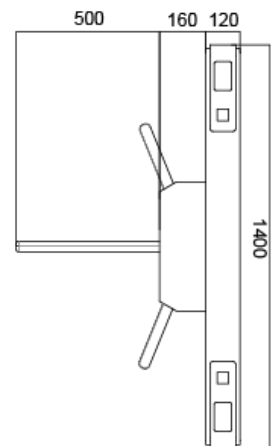

Side View

