

# KP-9792W



Resilience Through Heat, Precision Under Pressure

FEC


# KP: KEEN PERMANENCE

RESILIENCE THROUGH HEAT, PRECISION UNDER PRESSURE

KP-9792W / KP-9152W



SPLASH IT. DUST IT. IT STILL WORKS.

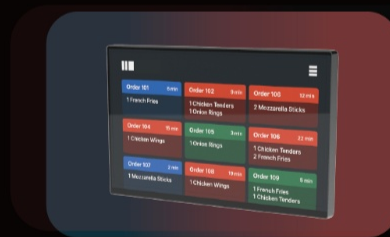

0°C - 50°C, RUNS COLD. RUNS HOT.




WET HAND / GLOVE OPERATION



POWER OVER ETHERNET  
ONE CABLE SOLUTION

# KP SPECIFICATIONS

Model	KP-9792W	KP-9152W
<b>Processor</b>	<b>Intel</b> N97/N150/Core 3 N355	<b>MTK</b> G700
<b>Memory</b>	1 x DDR4 SO-DIMM Socket (Standard 4G, up to 16GB)	1 x DDR4 8G on Board
<b>Storage</b>	1 x M.2 2280 SSD PCIe Gen 3x4 (Standard 128G, up to 512G)	1 x eMMC 64G on Board
<b>Speak</b>	2 x 2W	2 x 2W
<b>Display</b>	22" TFT, 1920 x1080	22" TFT, 1920 x 1080
<b>Brightness</b>	250 / 500 nits	250 / 500 nits
<b>Touch</b>	P-CAP (Support Water-Resistant & Glove Mode)	P-CAP (Support Water-resistant & Glove Mode)
<b>OS</b>	Windows 10 IoT Enterprise, Windows 10 Pro, Windows 11 IoT Enterprise, Windows 11 Pro, Linux by Request	Android 14
<b>Mounting</b>	VESA 100 x 100 mm	VESA 100 x 100 mm
<b>Certification</b>	FCC, CE Class B	FCC, CE Class B
<b>Construction/Color</b>	Aluminum Die-Casting + Plastic / Grey	Aluminum Die-Casting + Plastic / Grey
<b>Temperature</b>	Operation: 0°C ~ 50°C (32°F ~ 122°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)	Operation: 0°C ~ 50°C (32°F ~ 122°F) Storage: -20°C ~ 60°C (-4°F ~ 140°F)
<b>IO Port</b>	1 x 20V DC-in 1 x RJ45 GIGA LAN (Support PoE Function) 3 x USB 2.0 Type-A 1 x USB 3.0 Type-A 1 x RJ45 COM (RS232)	1 x 20V DC-in 1 x RJ45 GIGA LAN (Support PoE Function) 3 x USB 2.0 Type-A 1 x USB 3.0 Type-A 1 x SD Card Slot 1 x USB OTG Type-C 1 x Recovery Button
<b>IP Rating</b>	IP54 (All-Device)	IP54 (All-Device)
<b>Power</b>	20V/90W Adapter	20V/90W Adapter
<b>Dimensions (W x H x D)</b>	Product: 513.5 x 310 x 43 mm in Carton : 670 x 450 x 220 mm	Product: 513.5 x 310 x 43 mm in Carton : 670 x 450 x 220 mm
<b>Weight</b>	Net: 6.0 kg Gross: 8.0 kg	Net: 6.0 kg Gross: 8.0 kg
<b>Optional</b>	Options: PoE PD Module 24V/60W Wi-Fi Module (Internal) Peripherals Options: Scanner / RFID / LED Bar / Camera	Options: PoE PD Module 24V/60W Wi-Fi Module (Internal) Peripherals Options: Scanner / RFID / LED Bar / Camera

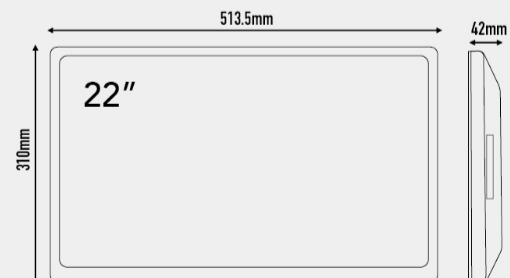

**BUILT TO WITHSTAND HARSH ENVIRONMENTS**

